
Template - E-commerce / Pizzabox

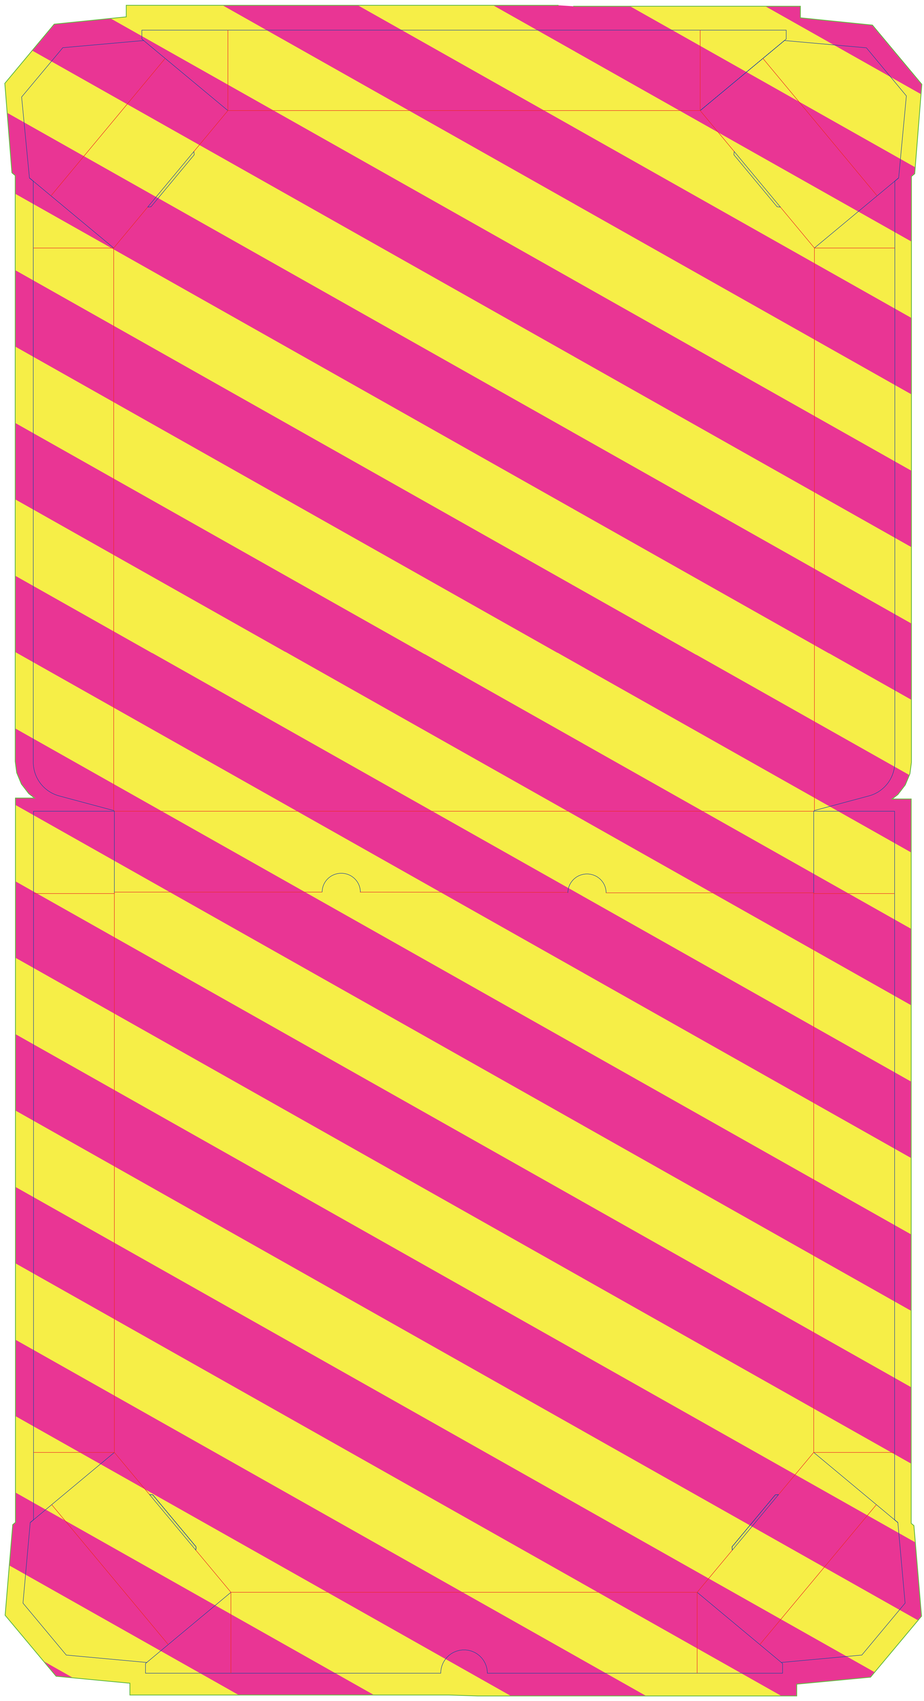

Print file

- Use our template for your design. Don't edit the template.
- Place your design on the designated design layer.
- Allow for atleast 3 mm bleed.
- Use CMYK colur system.
- Deliver a high resolution PDF (min 300dpi).
- The pdf-file shall not include print/cuttingmarks.

Dieline Information

- Red lines are creasing lines.
- Blue lines are cutting lines.
- Green line is the print area.

General Information

- Printed in CMYK with Fogra 39 colour profile on coated paper.
- Any colours specified in PMS will be printed in the closest CMYK mixture. Keep in mind that this may cause some deviation compared to the PMS scale.
- Colours displayed on screen may differ from finished print. Contact your closest contact person if you're interested in a colour proof.